BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of the work: **Estimate for Asphalting to Thindlu Old Village in Ward No. 09 (Change of Location: Improvements and Asphalting to NTI Layout 7th, 8th Cross and other Roads near Park in Ward No. 09 Vidyaranyapura Sub Division).**

			Estimate Cost:					2000000.00	
Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
1	KSRRB 300-2. Earth work excavation by manual means in Hard soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications MORTH chapter 3. **Page No. 152 / Item No. 19.2/ PWD SR 2013-14**	Cum							
	Desilting of Drains								
	Main Road		2	160.00	0.45	0.35	50.40		
	Berm Cutting								
	NTI Layout 9th Main Road		2	160.00	1.00	0.25	80.00		
	8th Cross		2	160.00	1.00	0.25	80.00		
	7th Cross		2	165.00	1.00	0.25	82.50		
	Cross Road		2	46.00	0.90	0.25	20.70		
							312.25	90.72	**28327.00**
	Basic Rate	84.00							
	Area Weightage @8%	6.72							
	Total	**90.72**							
2	Removing B.S. Slab Drain and stacking **(P.28 / I.5.32 PWD SR - 2013-14)**	Sqm							
	Main Road		2	130.00		1.35	351.00		
							351.00	50.11	**17589.00**
	Basic Rate	46.40							
	Area Weightage @8%	3.71							
	Total	**50.11**							
3	Refixing stone slabs of drains and pointing in CM (1:3) **(P. 28 / I. 5.33 PWD SR - 2013-14)**	Sqm							
			Vide Item No.2				**351.00**	70.04	**24583.00**
	Basic Rate	64.85							
	Area Weightage @ 8%	5.19							
	Total	**70.04**							
4	KSRRB 500-3: Scarifying existing stone metal layer upto 75mm thick along with their bituminous surface, picking up scarified materials and stacking of old serviceable materials with lead of 100m, sequential spreading of the salvaged aggregates with fresh aggregates on prepared base and consolidating as per water bound macadam specifications including cost of all labour, HOM of machineries complete as per specifications. MORTH chapter 5, **No. 175 / Item No. 21.3 / PWD SR 2013-14**	Sqm							
	NTI Layout 9th Main Road		1	160.00	5.00		800.00		

Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
	8th Cross		1	160.00	5.00		800.00		
	7th Cross		1	165.00	5.00		825.00		
	Cross Road		1	46.00	4.50		207.00		
							2625.00	72.79	**191079.00**
	Basic Rate	67.40							
	Area Weightage @ 8%	5.39							
	Total	**72.79**							
5	Providing, laying, spreading and compacting graded stone aggregate to **wet mix macadam** specification including premixing the Material with water at OMC in mechanical mix plant carriage of mixed Material by tipper to site, laying in uniform layers with paver in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications **(P. 170 / I. 20.18) PWD SR 2013-14.**	Cum							
	NTI Layout 9th Main Road		1	160.00	5.00	0.20	160.00		
	8th Cross		1	160.00	5.00	0.20	160.00		
	7th Cross		1	165.00	5.00	0.20	165.00		
	Cross Road		1	46.00	5.00	0.15	35.00		
							521.00	1121.04	**584062.00**
	Basic Rate	1038.00							
	Area Weightage @ 8%	83.04							
	Total	**1121.04**							
6	KSRRB 500-1 : Cleaning the existing WBM road surface including removing of binding materials and other foreign matter with wire bushes and small picks, sweeping with brooms or soft brushes and finally dusting with old gunny bags and / or compressed air to receive bituminous treatment including cost of all materials, labour, HOM of machineries, curing complete as per specifications. Specification No. 500-1.3 **(P. 175 / I. 21.1) PWDSR 2013-14**	Sqm							
	NTI Layout 9th Main Road		1	160.00	5.00		800.00		
	8th Cross		1	160.00	5.00		800.00		
	7th Cross		1	165.00	5.00		825.00		
	Cross Road		1	46.00	5.00		230.00		
							2655.00	10.53	**27957.00**
	Basic Rate	9.75							
	Area Weightage @ 8%	0.78							
	Total	**10.53**							
7	KSRRB 500-5: providing and applying primer coat from 12.2 to 14.6kg per 10 sqm for surfaces of high porosity over prepared surface of granular base with cut back M.C.-70 or any other bitumen mixed with diesel at 13 kg per 10 sqm heated in bitumen boiler fitted with spray set (excluding cleaning of road surface) including cost of all materials, labour, HOM of machineries complete as per specifications. MORTH chapter 5, **No. 175 / Item No. 21.5 / PWD SR 2013-14**	Sqm							

Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
			Qty Vide Item No. 6				2655.00		
							2655.00	142.07	**377206.00**
	Basic Rate	131.55							
	Area Weightage @ 8%	10.52							
	Total	**142.07**							
8	KSRRB M500-18: Providing and laying semi dense bituminous concrete 25mm thick with 100-120 TPH batch type HMP producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder at 4.5 to 5% of mix and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem roller to achieve the desired compaction as per MORTH specifications clause No. 500.8 complete in all respects as per specificationsWith 60/70 grade bitumen using 40-60 HMP, **No. 178 / Item No. 21.20.4 / PWD SR 2013-14.**	Cum							
	NTI Layout 9th Main Road		1	160.00	5.00	0.025	20.00		
	8th Cross		1	160.00	5.00	0.025	20.00		
	7th Cross		1	165.00	5.00	0.025	20.63		
	Cross Road		1	46.00	5.00	0.025	5.75		
							66.38	9981.36	**662513.00**
	Basic Rate	9242.00							
	Area Weightage @ 8%	739.36							
	Total	**9981.36**							
9	KSRRB M800-13: Road marking with hot applied thermoplastic compound with reflect rising glass beads on bituminous surface- providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads at 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface to level, uniform and free from streaks and holes complete as per specifications. MORTH specification No. 803, **No. 197 / Item No. 24.15 PWD SR 2013-14**	Sqm							
			2	200.00	0.10		40.00		
			2	60.00	0.10		12.00		
			2	40.00	0.10		8.00		
			2	150.00	0.10		30.00		
							90.00	471.96	**42476.00**
	Basic Rate	437.00							
	Area Weightage @ 8%	34.96							
	Total	**471.96**							
10	Lead for Disposal of Debris shall be payable at carriage rates by Mechanical means inlcuding loading and unloading. From 0.00 to 2.00 Km (Page No.123)	Cum							
			Vide Item No. 1				**312.25**	72.71	**22702.00**

Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
	Average weight of earth 1.28 tonne / kg for 2.56X1.28X2.00=5.12	5.12							
	Add loading and unloading Vide item no.17.1 P.no.141	62.20							
		67.32							
	Area Weightage @ 8%	5.39							
	Total	**72.71**							
11	For Third Party QC Charges @ 1% on Estimate Cost								**20000.00**
12	Miscellaneous and other Charges	L/S							**1506.00**
								Total	**2000000.00**
	(Rs. Twenty Lakhs Only)								

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per P.W.D S.R of 2013-14.
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Vidyaranyapura Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

"MODIFIED"

Technical Section for ₹ 2000000=00
Twenty Lakhs Rs only
Registered ... Subject to con...
No: 173 Dt: 16.10.14
Exe. Engr. Btp. Div. AE/JE
EE (BTP.Div.)

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE, BYATARAYANAPURA DIVISION

Lead Statement for Srinivaspura Dumping Yard for Ward No. 09, Vidyaranyapura Sub Division.

Lead Distance

1.	From BBMP Sub Division office to Devi Circle	1.50 Kms
2.	From Devi Circle to Thirumala Daba	2.00 Kms
3.	From Thirumala Daba to 3rd Cross SBI Bank	2.00 Kms
4.	From 3rd Cross SBI Bank to Sheshadripuram College	0.50 Kms
5.	From Shesadripuram College to Police Station	0.80 Kms
6.	From Police Station to Kogilu Cross	0.60 Kms
7.	From Kogilu Cross to Srinivasapura	4.00 Kms
8.	From Srinivasapura to Dumping Yard	0.50 Kms
	Total	**11.90 Kms**

Certificate:

1. Certified that the Srinivasapura Dumping Yard us the approved dumping yard for ward no. 09 BBMP
2. BBMP Sub Division office Vidyaranyapura is taken as the centre place for calculating the lead distance for ward no. 09.
3. The above distance is the shortest distance for calculating the lead.

Assistant Engineer Ward No. 09	Assistant Executive Engineer Vidyaranyapura Sub Division	Executive Engineer Byatarayanapura Division 16/12/2013

Name of work: Improvements and Asphalting to Thindlu old Village in ward No 09, in Vidyaranyapura Sub Division (Change of location: Improvements and Asphalting to NTI Layout 7th, 8th cross and other roads near park in ward No 09)

Assistant Engineer
Ward No 09

Assistant Executive Engineer
Vidyaranyapura Sub Division, BBMP

LOAD CHART FOR DUMPING YARD FOR WARD NO 09

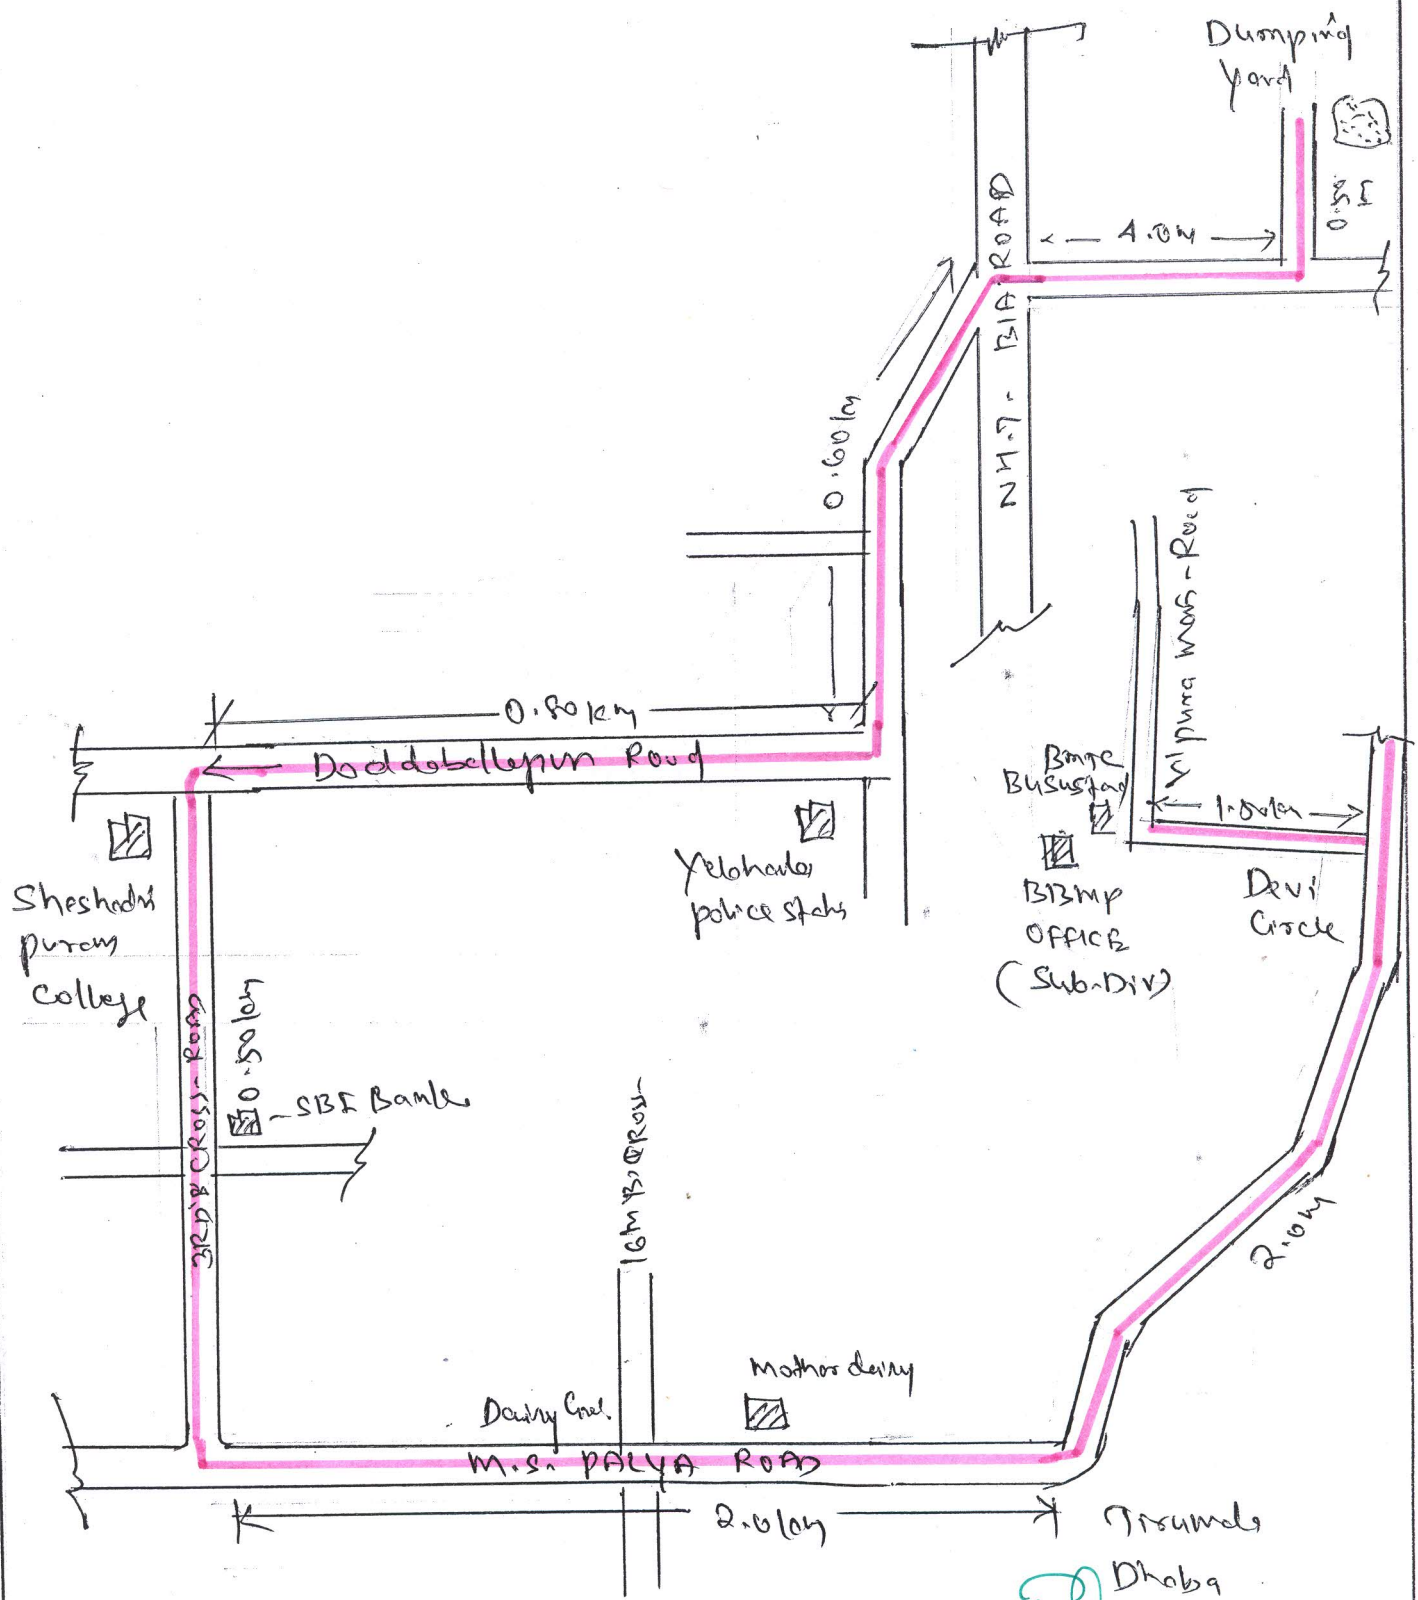

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು.
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ
ಯಲಹಂಕ ವಲಯ,
ಬೃ. ಬೆಂ. ಮ ಪಾ. ಬೆಂಗಳೂರು-97

Name of Work: Lamp and Asphalting to Thindlu old village Roads in Ward No. 09

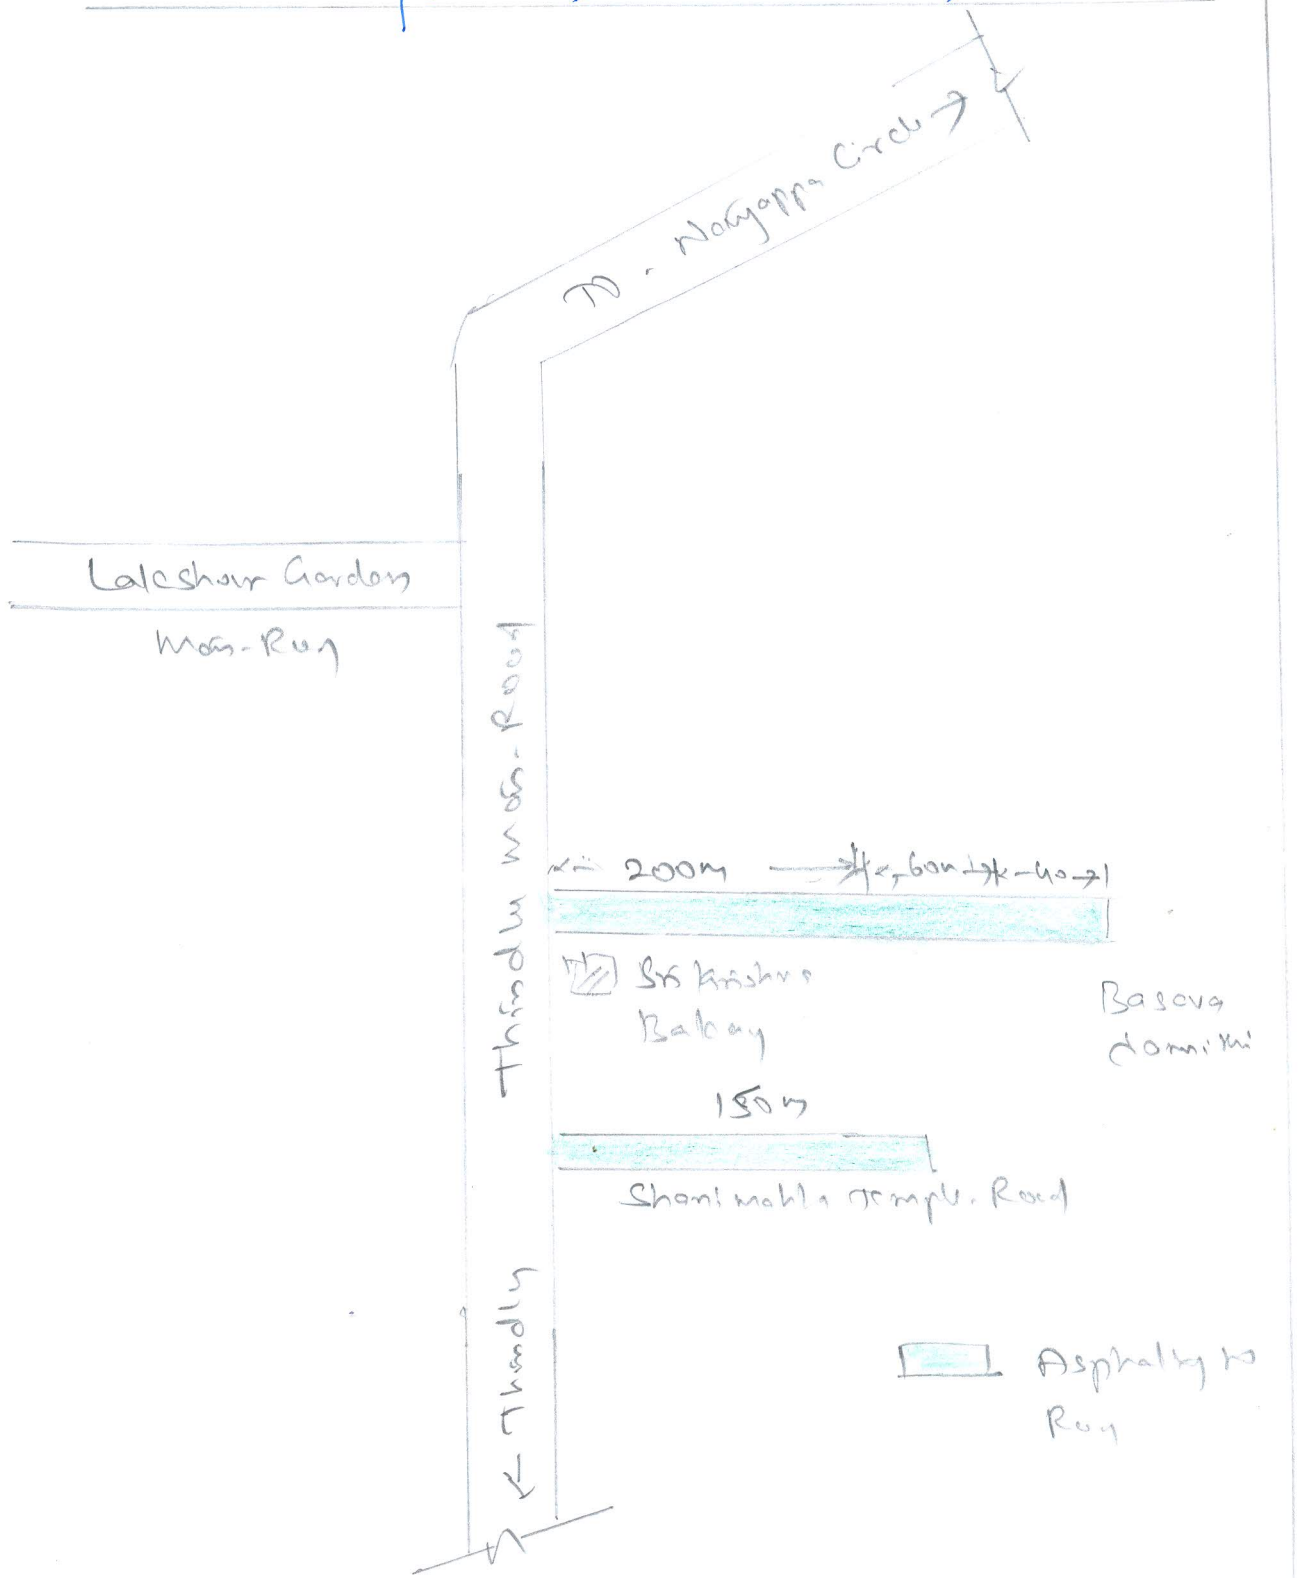

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಮಲ್ಲೇಶ್ವರಂ ಉಪ ವಿಭಾಗ
ಯಲಹಂಕ ವಲಯ,
ಬೃ. ಬೆಂ. ಮ. ಪಾ. ಬೆಂಗಳೂರು-97.